


## KERA.PRO – HOGE BELASTING | Pendelstuk



KERA.Pro inbouwstuk

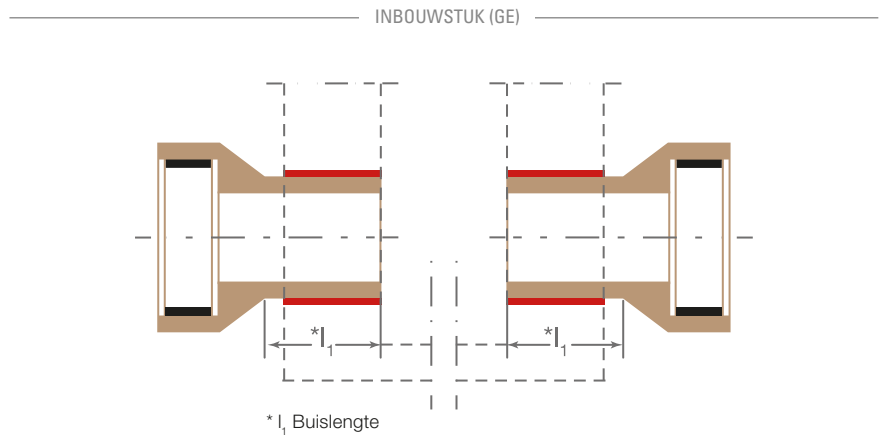

## KERA.PRO PENDELSTUK | HOGE BELASTING

Nominale diameter	Dichting	Verbindings-systeem	Buislengte	Gewicht	Sterkte-klasse
DN			$l_1$		
			cm	kg/st.	
200	K	C	25	21	240
250	K	C	25	35	240
300	K	C	25	46	240
400	K	C	25	67	200
500	K	C	25	123	160
600	K	C	25	176	160
700	K	C	25	185	120
800	K	C	25	215	120